


THE INFORMATION CONTAINED HEREIN IS CONSIDERED "PROPRIETARY" TO BEL FUSE INC. AND SHALL NOT BE COPIED, REPRODUCED OR DISCLOSED WITHOUT THE WRITTEN APPROVAL OF BEL FUSE INC.

PRELIMINARY



ELECTRICAL CHARACTERISTICS @ 25°C

SCHEMATIC

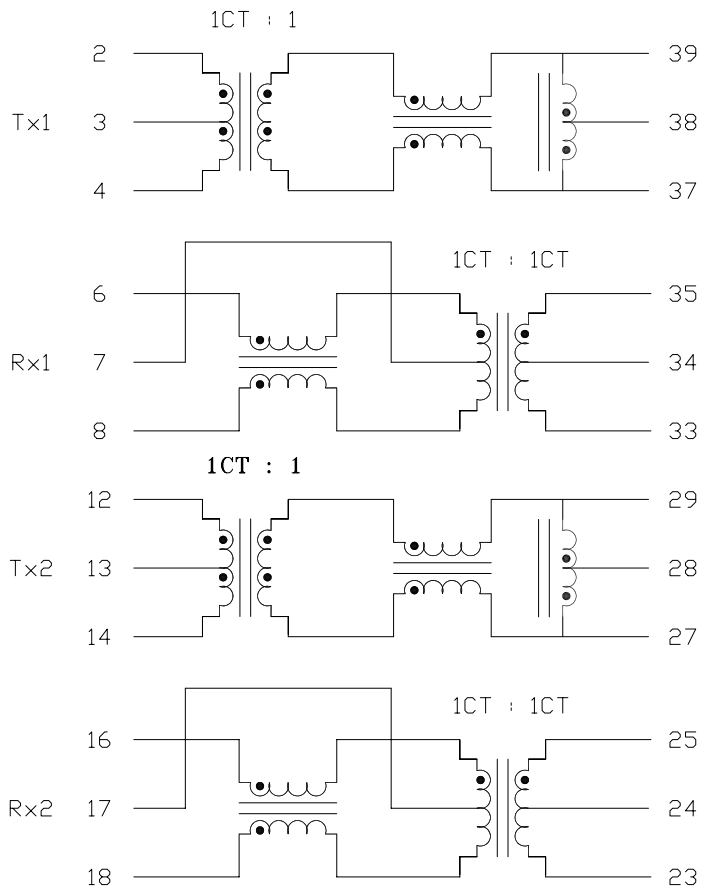

TURNS RATIO
 Tx SIDE: 1CT : 1
 Rx SIDE: 1CT : 1CT
 POLARITY: 2 & 39, 6 & 35, 12 & 29, 16 & 25
 IN PHASE
 DCL: 350uH MIN. @ 100kHz, 100mV
 WITH 8mA D.C. BIAS
 INSERTION LOSS: 1.0dB MAX. AT 100kHz TO 80MHZ
 RETURN LOSS: MEASURED UNDER A 100 Ω ENVIRONMENT
 RISE TIME: 2.5 nS TYP.
 COMMON TO DIFFEENTIAL MODE REJECTION: 40dB MIN. AT 100kHz TO 100MHZ
 COMMON TO COMMON MODE REJECTION: 30dB MIN. AT 100kHz TO 100MHZ
 CROSSTALK: 35dB MIN. AT 100kHz TO 100MHZ
 HIPOT: PER HAND-WORK-03

FREQ.(MHz)	2	5	10	30	45	60	80
dB MIN	20	20	20	18	15	12	10


DRWN DQ Chen	DATE 12-10-04	TITLE 10/100BT DUAL MAGNETICS MODULE	PART NO. / DRAWING NO. X558599979-F
CHKD HQ	DATE 12-10-04	S558-5999-79-F	FILE NAME X558599979FPA.DWG

STANDARD DIM. TOL. IN INCH	[] METRIC DIM. AS REFERENCE
.X	UNIT : INCH [mm] REV. : PA
.XX	SCALE : N/A SIZE : A4
.XXX	PAGE : 2





THE INFORMATION CONTAINED HEREIN IS CONSIDERED "PROPRIETARY" TO BEL FUSE INC. AND SHALL NOT BE COPIED, REPRODUCED OR DISCLOSED WITHOUT THE WRITTEN APPROVAL OF BEL FUSE INC.


PRELIMINARY

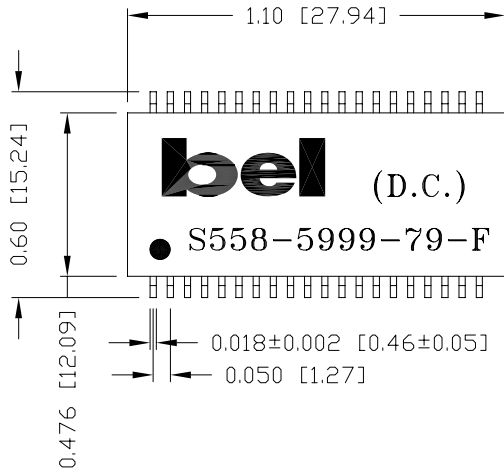

SUGGESTED PCB PAD LAYOUT

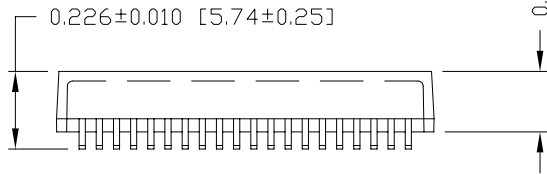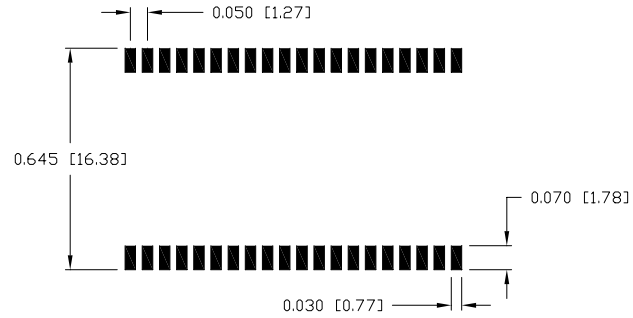

0.010 [0.25] MIN.

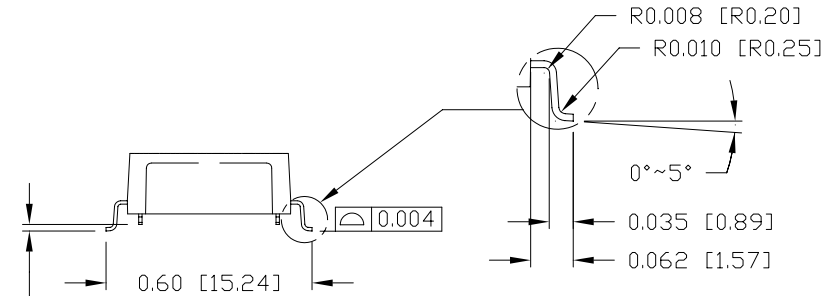

NOTES:

- STANDARD MARKING REFER TO DOC. HAND-WORK-04.
- PACKAGE CODE: "RRS001".

DRWN Yang Hao	DATE 12-10-04	TITLE MECHANICAL DRAWING S558-5999-79-F	PART NO. / DRAWING NO. X558599979-F	STANDARD DIM. TOL. IN INCH		[] METRIC DIM. AS REFERENCE		REV. : PA	PAGE : 3
				.X		UNIT : INCH [mm]	SCALE : N/A		
CHKD Lawrence	DATE 12-10-04		FILE NAME X558599979FPA.DWG	.XX	±0.01				
				.XXX	±0.005				

