International
IOR Rectifier

PD-95437

IRF7526D1PbF

FETKY ™ MOSFET & Schottky Diode

- Co-packaged HEXFET® Power MOSFET and Schottky Diode
- P-Channel HEXFET
- Low V_F Schottky Rectifier
- Generation 5 Technology
- Micro8™ Footprint
- Lead-Free



Top View

V_{DSS} = -30V

$R_{DS(on)}$ = 0.20Ω

Schottky Vf = 0.39V

Description

The **FETKY**™ family of co-packaged HEXFETs and Schottky diodes offer the designer an innovative board space saving solution for switching regulator applications. Generation 5 HEXFETs utilize advanced processing techniques to achieve extremely low on-resistance per silicon area. Combining this technology with International Rectifier's low forward drop Schottky rectifiers results in an extremely efficient device suitable for use in a wide variety of portable electronics applications like cell phone, PDA, etc.


Micro8™

The new Micro8™ package, with half the footprint area of the standard SO-8, provides the smallest footprint available in an SOIC outline. This makes the Micro8™ an ideal device for applications where printed circuit board space is at a premium. The low profile (<1.1mm) of the Micro8™ will allow it to fit easily into extremely thin application environments such as portable electronics and PCMCIA cards.

Absolute Maximum Ratings

	Parameter	Maximum	Units
I_D @ T_A = 25°C	Continuous Drain Current, V_{GS} @ -4.5V	-2.0	A
I_D @ T_A = 70°C		-1.6	
I_{DM}	Pulsed Drain Current À	-16	
P_D @T_A = 25°C	Power Dissipation	1.25	W
P_D @T_A = 70°C		0.8	
	Linear Derating Factor	10	mW/°C
V_{GS}	Gate-to-Source Voltage	± 20	V
dv/dt	Peak Diode Recovery dv/dt Á	-5.0	V/ns
T_J, T_{STG}	Junction and Storage Temperature Range	-55 to +150	°C

Thermal Resistance Ratings

Parameter		Maximum	Units
$R_{\theta JA}$	Junction-to-Ambient Ã	100	°C/W

Notes:

① Repetitive rating – pulse width limited by max. junction temperature (see Fig. 9)

② I_{SD} ≤ -1.2A, di/dt ≤ 160A/µs, V_{DD} ≤ $V_{(BR)DSS}$, T_J ≤ 150°C

③ Pulse width ≤ 300µs – duty cycle ≤ 2%

④ When mounted on 1 inch square copper board to approximate typical multi-layer PCB thermal resistance

MOSFET Electrical Characteristics @ T_J = 25°C (unless otherwise specified)

	Parameter	Min.	Typ.	Max.	Units	Conditions
$V_{(BR)DSS}$	Drain-to-Source Breakdown Voltage	-30	—	—	V	V_{GS} = 0V, I_D = -250µA
$R_{DS(on)}$	Static Drain-to-Source On-Resistance	—	0.17	0.20	Ω	V_{GS} = -10V, I_D = -1.2A ③
		—	0.30	0.40		V_{GS} = -4.5V, I_D = -0.60A ③
$V_{GS(th)}$	Gate Threshold Voltage	-1.0	—	—	V	V_{DS} = V_{GS}, I_D = -250µA
g_{fs}	Forward Transconductance	0.94	—	—	S	V_{DS} = -10V, I_D = -0.60A
I_{DSS}	Drain-to-Source Leakage Current	—	—	-1.0	µA	V_{DS} = -24V, V_{GS} = 0V
		—	—	-25		V_{DS} = -24V, V_{GS} = 0V, T_J = 125°C
I_{GSS}	Gate-to-Source Forward Leakage	—	—	-100	nA	V_{GS} = -20V
	Gate-to-Source Reverse Leakage	—	—	100		V_{GS} = 20V
Q_g	Total Gate Charge	—	7.5	11	nC	I_D = -1.2A
Q_{gs}	Gate-to-Source Charge	—	1.3	1.9		V_{DS} = -24V
Q_{gd}	Gate-to-Drain ("Miller") Charge	—	2.5	3.7		V_{GS} = -10V, See Fig. 6 ③
$t_{d(on)}$	Turn-On Delay Time	—	9.7	—	ns	V_{DD} = -15V
t_r	Rise Time	—	12	—		I_D = -1.2A
$t_{d(off)}$	Turn-Off Delay Time	—	19	—		R_G = 6.2Ω
t_f	Fall Time	—	9.3	—		R_D = 12Ω, ③
C_{iss}	Input Capacitance	—	180	—	pF	V_{GS} = 0V
C_{oss}	Output Capacitance	—	87	—		V_{DS} = -25V
C_{rss}	Reverse Transfer Capacitance	—	42	—		f = 1.0MHz, See Fig. 5

MOSFET Source-Drain Ratings and Characteristics

	Parameter	Min.	Typ.	Max.	Units	Conditions
I_S	Continuous Source Current(Body Diode)	—	—	-1.25	A	
I_{SM}	Pulsed Source Current (Body Diode)	—	—	-9.6		
V_{SD}	Body Diode Forward Voltage	—	—	-1.2	V	T_J = 25°C, I_S = -1.2A, V_{GS} = 0V
t_{rr}	Reverse Recovery Time (Body Diode)	—	30	45	ns	T_J = 25°C, I_F = -1.2A
Q_{rr}	Reverse Recovery Charge	—	37	55	nC	di/dt = 100A/µs ③

Schottky Diode Maximum Ratings

	Parameter	Max.	Units	Conditions	
$I_{F(av)}$	Max. Average Forward Current	1.9	A	50% Duty Cycle. Rectangular Wave, T_A = 25°C	
		1.3		See Fig. 14	T_A = 70°C
I_{SM}	Max. peak one cycle Non-repetitive	120	A	5µs sine or 3µs Rect. pulse	Following any rated
	Surge current	11		10ms sine or 6ms Rect. pulse	load condition & with V_{RRM} applied

Schottky Diode Electrical Specifications

	Parameter	Max.	Units	Conditions	
V_{FM}	Max. Forward voltage drop	0.50	V	I_F = 1.0A, T_J = 25°C	
		0.62		I_F = 2.0A, T_J = 25°C	
		0.39		I_F = 1.0A, T_J = 125°C	
		0.57		I_F = 2.0A, T_J = 125°C .	
I_{RM}	Max. Reverse Leakage current	0.06	mA	V_R = 30V	T_J = 25°C
		16			T_J = 125°C
C_t	Max. Junction Capacitance	92	pF	V_R = 5Vdc (100kHz to 1 MHz) 25°C	
dv/dt	Max. Voltage Rate of Change	3600	V/µs	Rated V_R	

(HEXFET is the reg. TM for International Rectifier Power MOSFET's)

Power Mosfet Characteristics

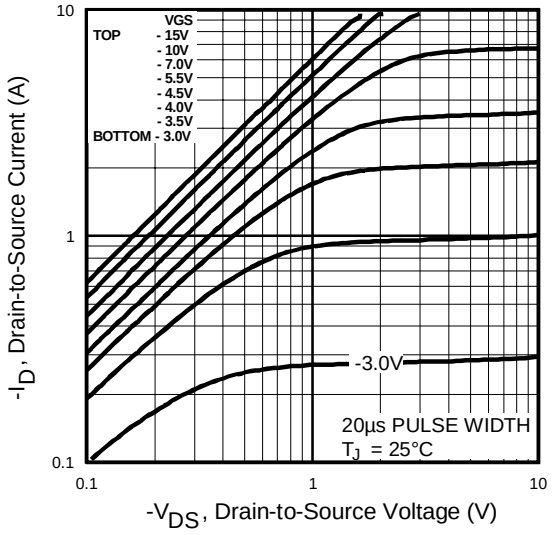

Fig 1. Typical Output Characteristics

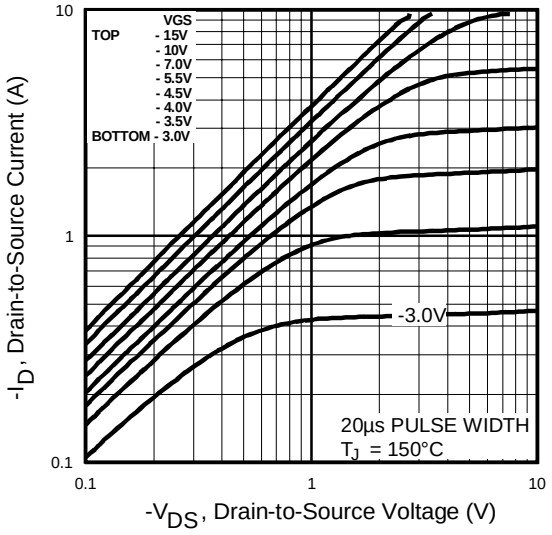

Fig 2. Typical Output Characteristics

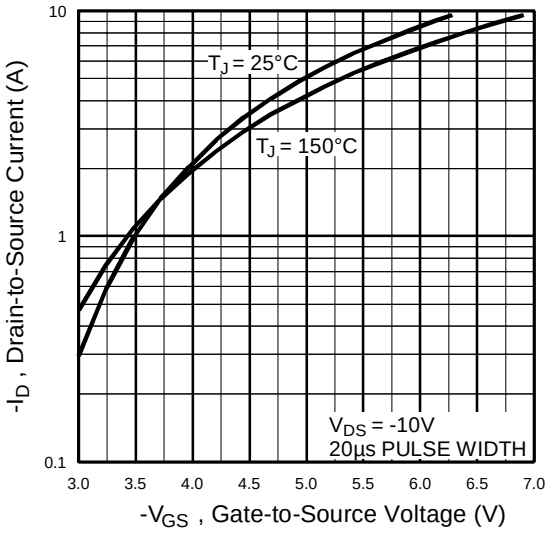

Fig 3. Typical Transfer Characteristics

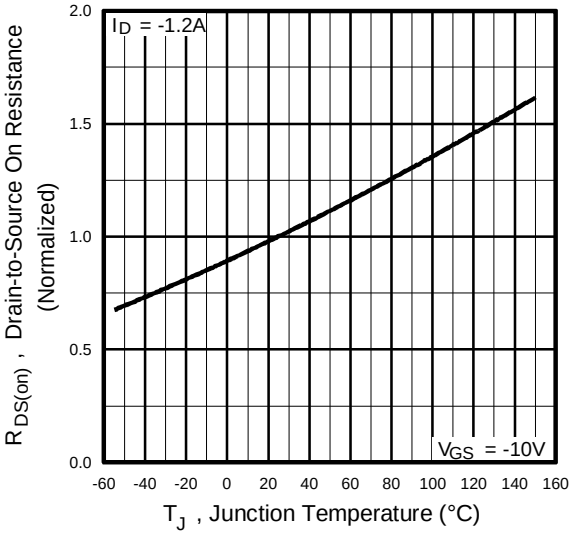

Fig 4. Normalized On-Resistance Vs. Temperature

Power Mosfet Characteristics

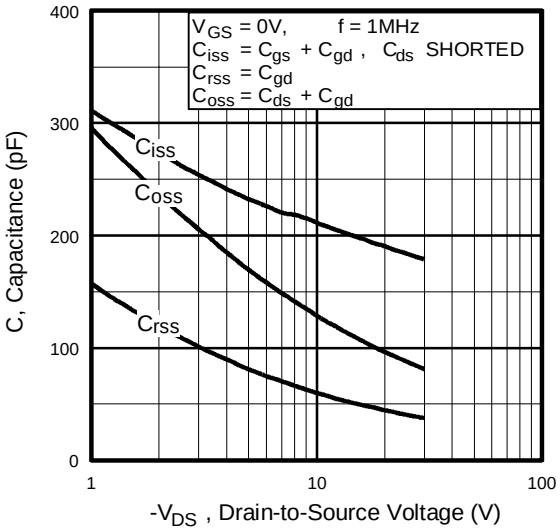

Fig 5. Typical Capacitance Vs. Drain-to-Source Voltage

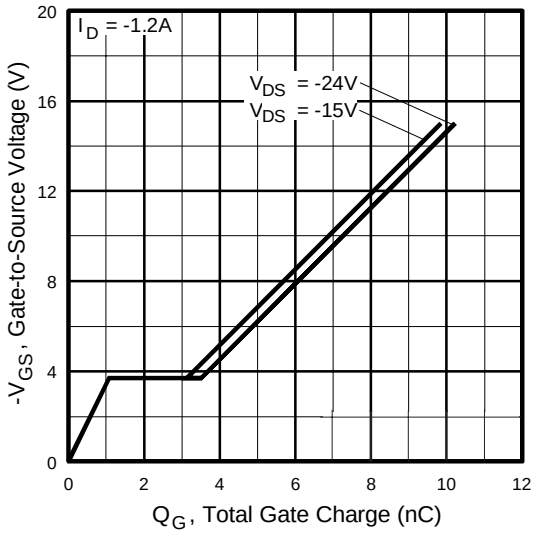

Fig 6. Typical Gate Charge Vs. Gate-to-Source Voltage

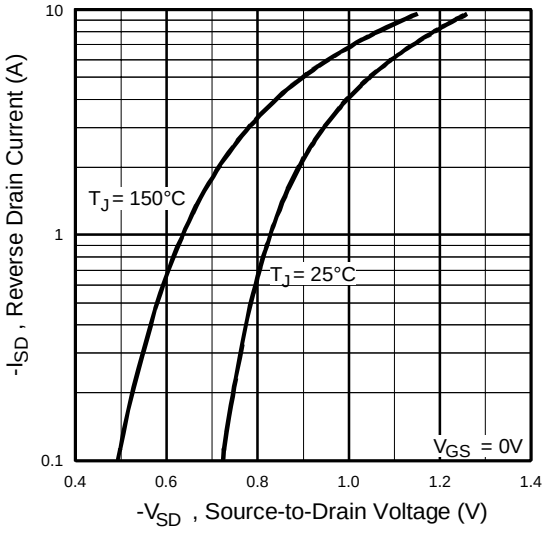

Fig 7. Typical Source-Drain Diode Forward Voltage

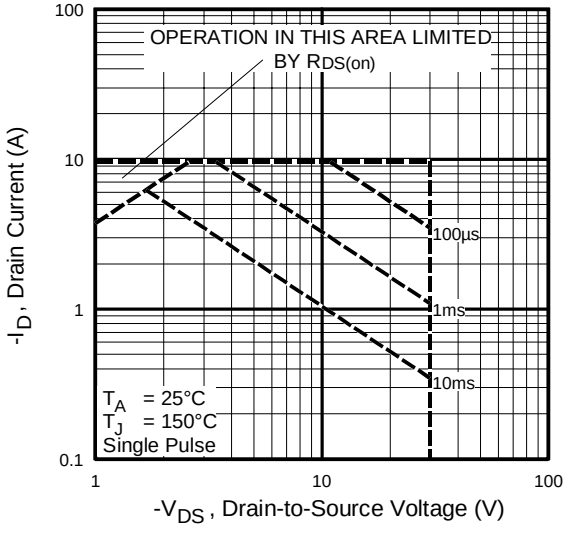

Fig 8. Maximum Safe Operating Area

Power Mosfet Characteristics

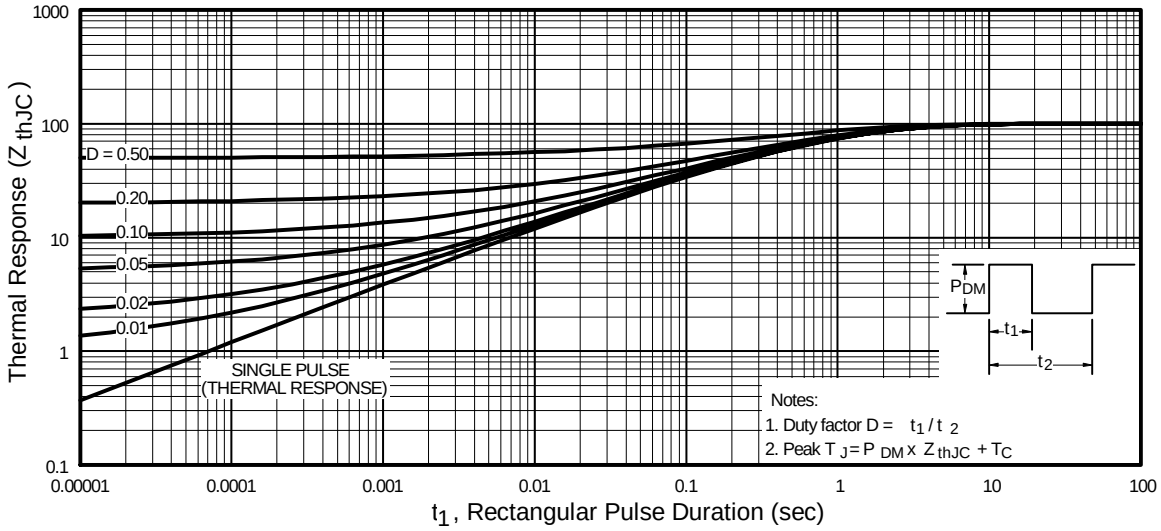

Fig 9. Maximum Effective Transient Thermal Impedance, Junction-to-Ambient

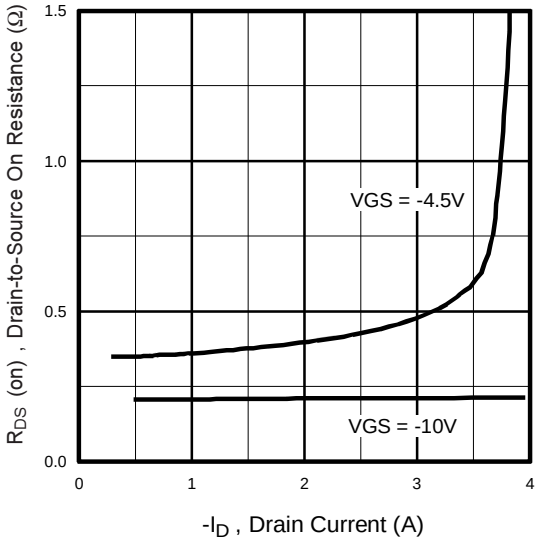

Fig 10. Typical On-Resistance Vs. Drain Current

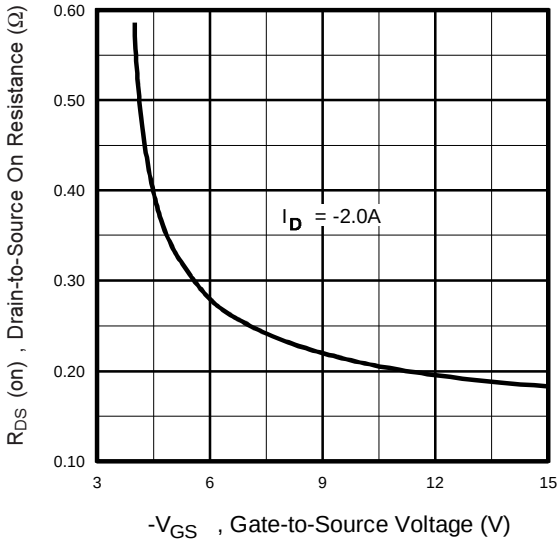

Fig 11. Typical On-Resistance Vs. Gate Voltage

Schottky Diode Characteristics

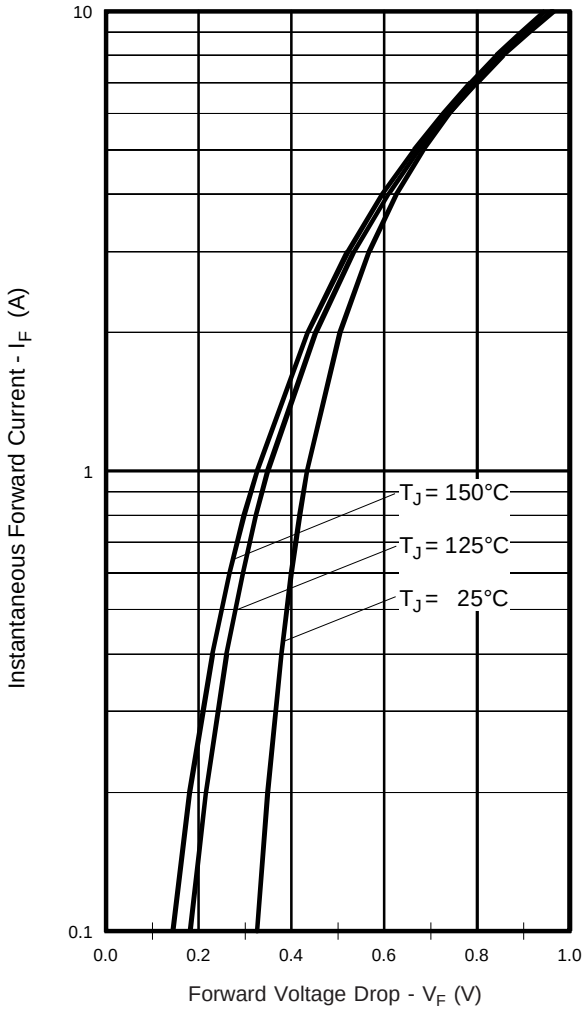

Fig. 12 -Typical Forward Voltage Drop Characteristics

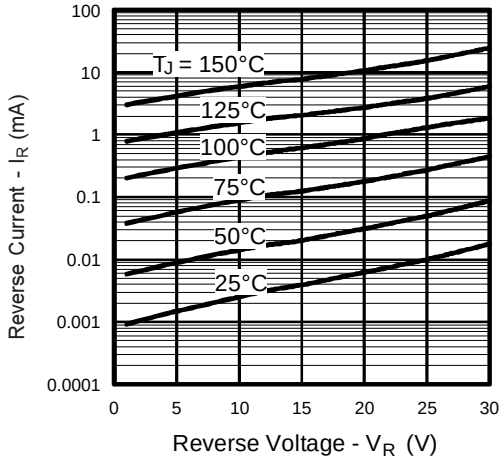

Fig. 13 - Typical Values of Reverse Current Vs. Reverse Voltage

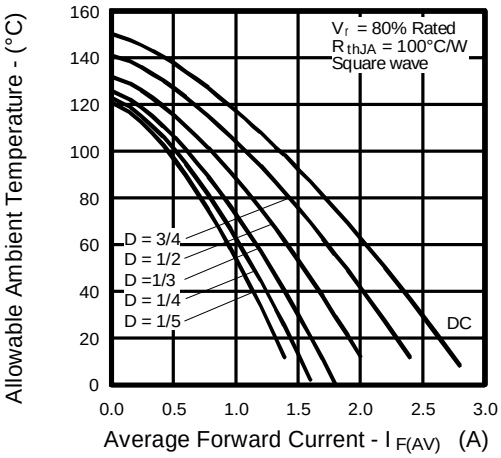

Fig.14 - Maximum Allowable Ambient Temp. Vs. Forward Current

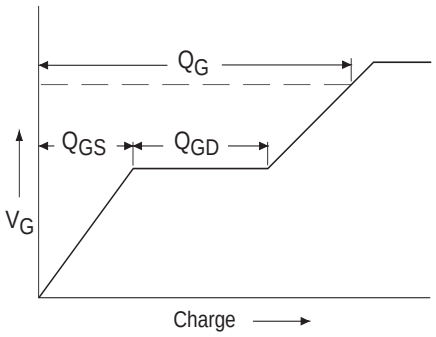

Fig 15a. Basic Gate Charge Waveform

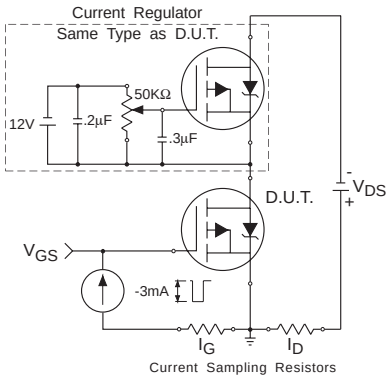

Fig 15b. Gate Charge Test Circuit

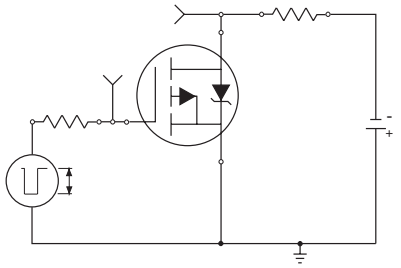

Fig 16a. Switching Time Test Circuit

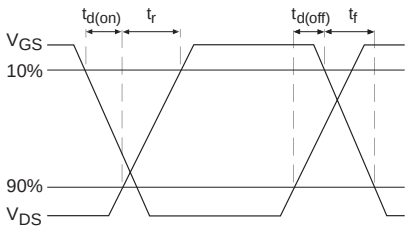

Fig 16b. Switching Time Waveforms

Peak Diode Recovery dv/dt Test Circuit

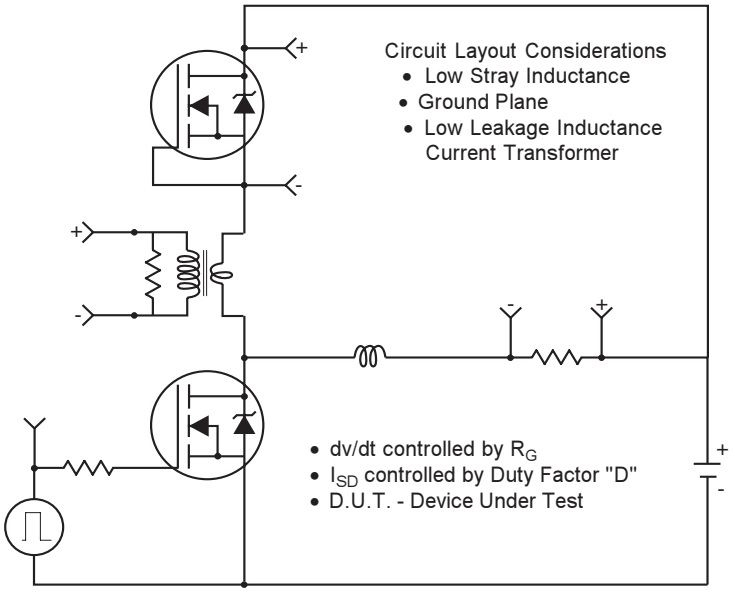

* Reverse Polarity for P-Channel
** Use P-Channel Driver for P-Channel Measurements

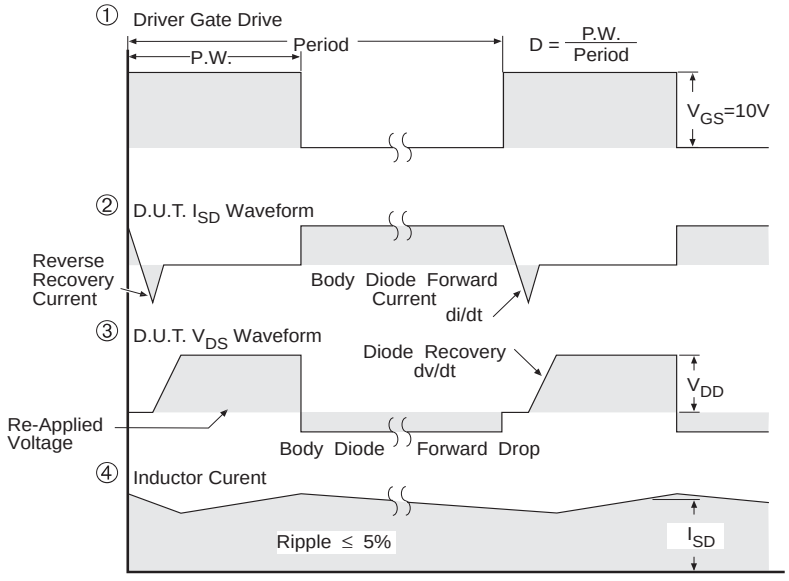

*** V_{GS} = 5.0V for Logic Level and 3V Drive Devices

Fig 17 For P Channel HEXFETS

Micro8 Package Outline

Dimensions are shown in milimeters (inches)

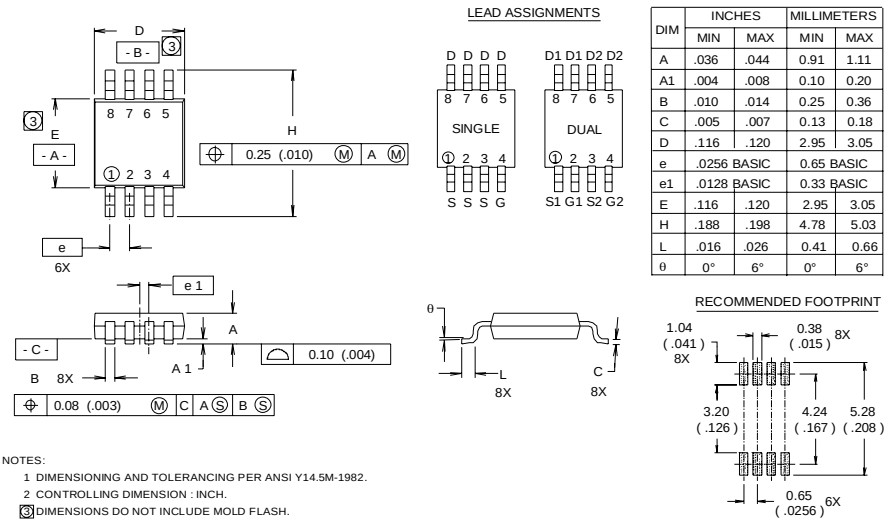

DIM	INCHES		MILLIMETERS	
	MIN	MAX	MIN	MAX
A	.036	.044	0.91	1.11
A1	.004	.008	0.10	0.20
B	.010	.014	0.25	0.36
C	.005	.007	0.13	0.18
D	.116	.120	2.95	3.05
e	.0256 BASIC		0.65 BASIC	
e1	.0128 BASIC		0.33 BASIC	
E	.116	.120	2.95	3.05
H	.188	.198	4.78	5.03
L	.016	.026	0.41	0.66
θ	0°	6°	0°	6°

NOTES:
1 DIMENSIONING AND TOLERANCING PER ANSI Y14.5M-1982.
2 CONTROLLING DIMENSION : INCH.
3 DIMENSIONS DO NOT INCLUDE MOLD FLASH.

Micro8 Part Marking Information

EXAMPLE: THIS IS AN IRF7501

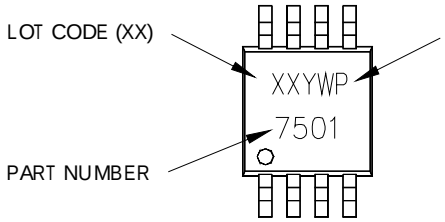

WW = (1-26) IF PRECEDED BY LAST DIGIT OF CALENDAR YEAR

YEAR	Y	WORK WEEK	W
2001	1	01	A
2002	2	02	B
2003	3	03	C
2004	4	04	D
2005	5		
2006	6		
2007	7		
2008	8		
2009	9		
2010	0	24	X
		25	Y
		26	Z

WW = (27-52) IF PRECEDED BY A LETTER

YEAR	Y	WORK WEEK	W
2001	A	27	A
2002	B	28	B
2003	C	29	C
2004	D	30	D
2005	E		
2006	F		
2007	G		
2008	H		
2009	J		
2010	K	50	X
		51	Y
		52	Z

Micro8 Tape & Reel Information

Dimensions are shown in millimeters (inches)

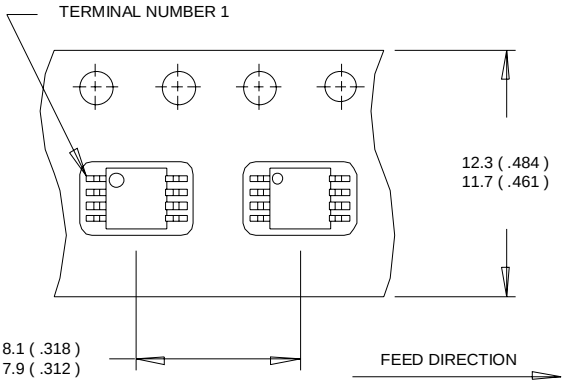

NOTES:
1. OUTLINE CONFORMS TO EIA-481 & EIA-541.
2. CONTROLLING DIMENSION : MILLIMETER.

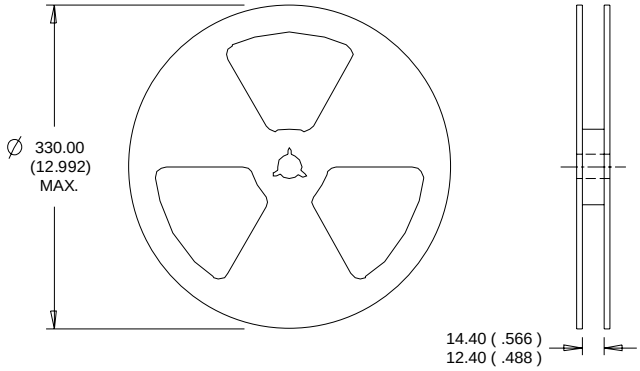

NOTES :
1. CONTROLLING DIMENSION : MILLIMETER.
2. OUTLINE CONFORMS TO EIA-481 & EIA-541.

Data and specifications subject to change without notice.
This product has been designed and qualified for the Consumer market.
Qualifications Standards can be found on IR's Web site.

International
IOR Rectifier

IR WORLD HEADQUARTERS: 233 Kansas St., El Segundo, California 90245, USA Tel: (310) 252-7105
TAC Fax: (310) 252-7903
Visit us at www.irf.com for sales contact information. 02/05