

Your Kit contains:

- 2 x Shield Can Sheets
- 24 x RFI Shield Clips
- 1 x Instruction Sheet

Tools required:


- A pair of scissors
- A rule
- · A solid, flat work surface

HARWIN

Shield Can Kit Instruction Sheet

S01-806005KIT

IS-39 Issue: 3 Date: 12/03/2018

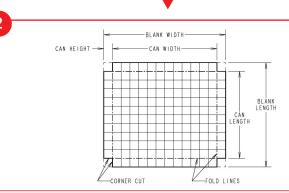

Use this diagram as a guide when cutting your etched Shield Can Sheets.



Creating the blank:

- Cut along the etch lines to create blank size (Step 2).
- It's not necessary to cut all the way; fold the surplus section back and forth until it breaks away.



Creating the flat pattern:

- Remove corners of the sheet; one grid square equals 5mm can height.
- Cut one edge with scissors, then fold back and forth along the other edge until the square breaks away.
- Repeat on the remaining three corners.

5


Forming:

- Securely hold the rule along your fold line.
- Apply force to bend the sheet against the work surface.
- Ensure that the side is bent to 90° with etching inside the can.
- Repeat on the opposite side.




Note:

Maintaining your hold on the rule whilst bending will ensure that the edge has a sharper form.

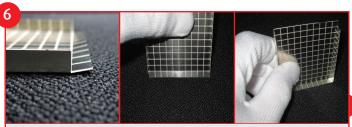

Forming cont.:

- On the third side of the can, apply light force with hands to the fold line; forming a slight bend (above).
- Using your work surface, push the side flat against it (90° to top surface).
- Repeat on the opposite side.

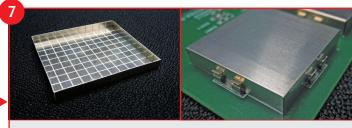

You now have a finished can! Use the can with S1711-46R RFI Shield Clips provided.

Harwin recommend S1711-46R clips are reflow soldered to a PCB.




Pick & Place Ready By Design

- Simplifies production processes.
- Increased design flexibility and decreased costs.
- Surface mount designs available in tape & reel for fully automated assembly.
- ▶ Free samples available on-line at www.harwin.com
- Stocked in depth throughout our world-wide distribution network.





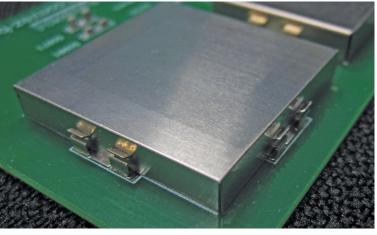



To check stock availability visit www.harwin.com and enter part no. S01-806005KIT